

YL130Wp, Yingli Solar

Yingli's 130 watt photovoltaic module is designed for large electrical power requirements. With a 25 year warranty, the YL130 has superb durability to withstand rigorous operating conditions. Ideal for grid-connected and remote power systems, the YL130 offers high usable power per square foot of solar array.

- ◆ Solar Cell: High efficiency crystalline solar cell. Even if under the weak light, the solar module can produce maximum power output.
- ◆ Tempered glass: Anti-reflecting coating and high transmission rate glass increase the power output and mechanical strength of solar module.
- ◆ EVA and TPT: Using high quality EVA and TPT to prevent destroying and water.
- ◆ Al frame: Without screw, corner connection. 6 holes on the frame can be installed easily.
- ◆ Junction box: Multi function junction box with water proof.
- ◆ Long lifetime: ≥ 25 years; Less power decrease.
- ◆ Good performance of preventing from atrocious weather such as wind and hails.
- ◆ Resisting moisture and etching effectively, not effect by geology.



- World-class Product and Service
- Complete Production Chain
- PV Manufacturer from China

YL130Wp, Yingli Solar

- World-class Product and Service
- Complete Production Chain
- PV Manufacturer from China

ELECTRICAL PARAMETER

Module type	130(17)PR1470×680
Cell	Poly-crystal silicon
No. of Cells and Connections	36 in series
Maximum Power (Pm)	130W±3%
Maximum Power Voltage (Vpm)	17.5V
Maximum Power Current (Ipm)	7.43A
Open Circuit Voltage (Voc)	22.0V
Short Circuit Current (Isc)	8.44A

(* (STC) Standard Test Conditions: 25°C, 1 KW/m², AM 1.5)

MECHANICAL CHARACTERISTIC

Dimensions (HxWxD)	1470×680×35mm
Weight	16.0Kg(26.4 Pound)
Area	0.99m ²

(Cable Length 900mm provide by clients' requirement)


TEMPERATURE COEFFICIENTS

Power	T _k (Wp)	-0.45%/°C
Open Circuit Voltage	T _k (Voc)	-0.37%/°C
Short Circuit Current	T _k (Isc)	+0.06%/°C


ABSOLUTE MAXIMUM LIMITS

Max System Voltage	V	600
Module Operating Temperature	°C	-45—+85
Wind Velocity	Km/h	130
Noct	°C	46±2


IV CURVES

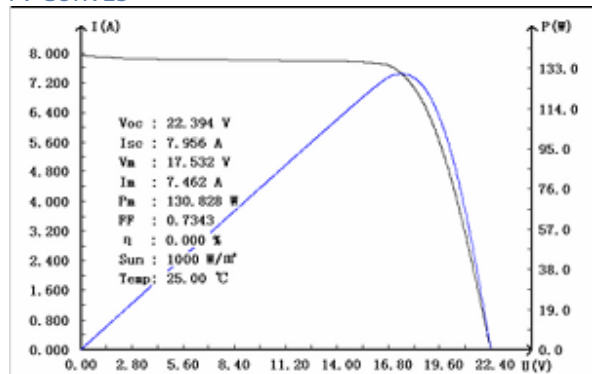

INSTALLATION DIMENSIONS

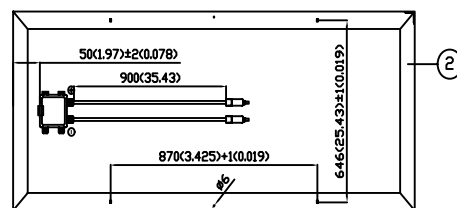

back side

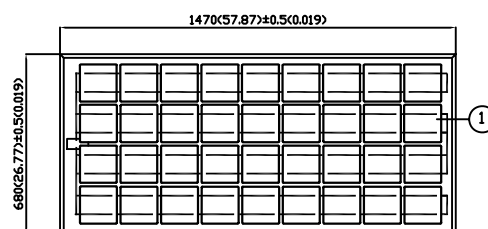

Front side



Yingli Energy(Beijing)CO.,LTD
 www.yinglienergy.com
 Tel:+86 10 6554 6068
 Fax:+86 10 6554 1878